




UP-TO-DATE

LED TECHNOLOGY

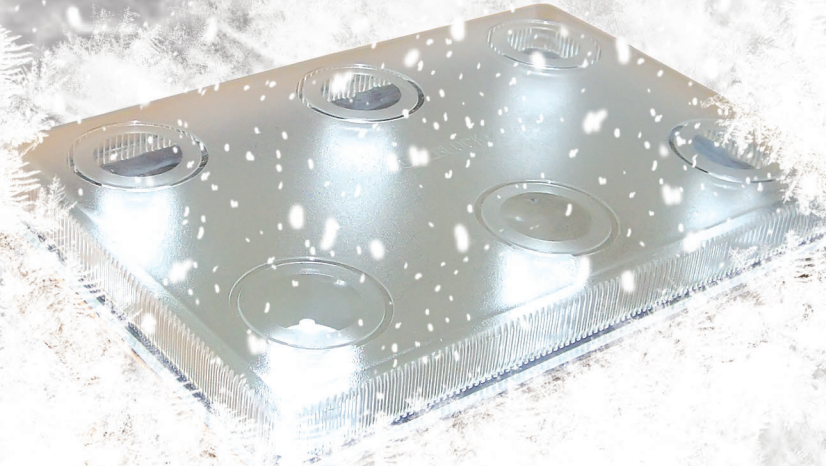

IP66


CHILBLOCK[®] POWER LED LAMP

ESPECIALLY DESIGNED FOR COLD STORAGE WITH HIGH ENERGY EFFICIENCY


MODULAR CONCEPT FOR VARIOUS APPLICATIONS

Features:

- Using LUXEON[®] Rebel LED of PHILIPS LUMILEDS for the best lumen maintenance, superior reliability and quality
- Wide range of operating temperature: $-50^{\circ}\text{C} \div +80^{\circ}\text{C}$, with light efficiency increased at low temperature (increase 10% at -20°C compared with at 30°C)
- Life time: 50,000 hours (equivalent 15 years, 8h/day)
- Fast on/off switching, convenient for manual or automatic control
- Available in 3 capacities 15W-20W-25W, with module designed for adapting any required performance
- Produced for various height applications for better lighting: low (2-4m), medium (5-8m), high (9-15m)
- Safely operating with low voltage: 24 - 45VDC
- Separated power module certified CE, RoHS, IP66 with power input: 170 - 250VAC, 50-60Hz
- Warranty: 2 years

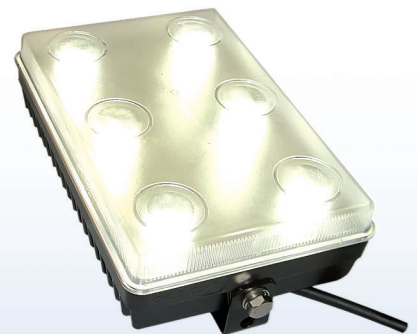

15W-20W-25W
1080lm-1440lm-1800lm

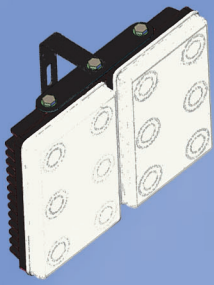

CHILBLOCK[®] POWER LED LAMP

HIGH ENERGY EFFICIENCY FOR COLD STORAGE

PRODUCT CODE: CPL - A - B - C

CPL: CHILBLOCK POWER LED LAMP

A	B	C
POWER	HEIGHT	POWER SUPPLY
15W 20W 25W	L = 2 - 4m M = 5 - 8m H = 9 - 15m	C = CURRENT POWER V = VOLTAGE POWER


Example: **CPL-15-L-C** refers to 15W power, 2 - 4m height, using current power.



15W







20W

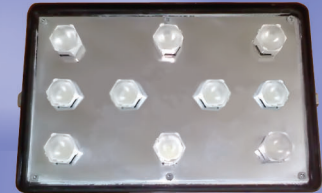

25W



COLD STORAGE REFERENCES

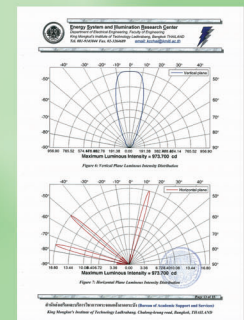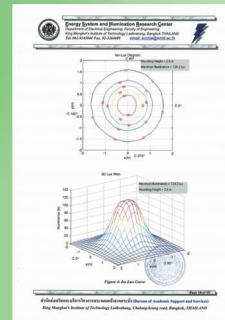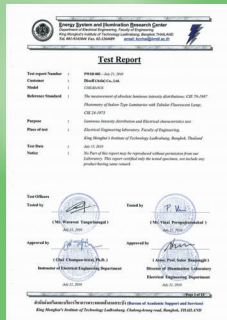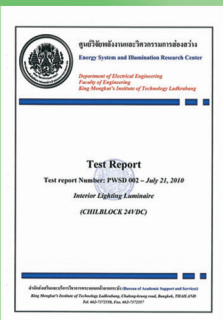

TEST REPORT FOR CHILBLOCK POWER LED LAMP CPL-15-L-V



HUNG TRI REFRIGERATION INDUSTRY JSC
 51 Tran Phu Str., Ward 4, Dist. 5
 HoChiMinh City, Vietnam
 Tel: (84-8) 3835 2741 Fax: (84-8) 3830 4884
 Website: www.hungtri.com



* Technical data is subject to change without prior notice